


TYPE 66ECC 3,8/6,6 kV

SANS 1520-2

POWERMITE

Flexible copper screened mining cables

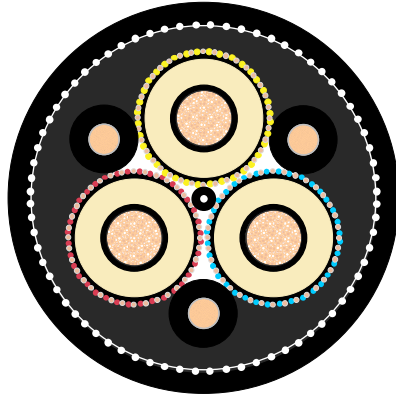

CONSTRUCTION	
Cable type	Type 66 ECC 3,8/6,6 kV to SANS 1520-2
Conductors	Flexible class 5 comply to SANS 1411 - 1 from tinned annealed copper wires , left hand with semi-conducting rubber screen .
Insulation	Ethylene propylene thermosetting compound type RD 3 comply to SANS 1411-3 and a strippable semi-conducting core screen (triple extruded)
Insulation screen	The braid of tinned copper wires .
Cable assembly	Three tinned copper/nylon braid screened power cores and two unscreened pilot cores and one tinned ECC core positioned in each interstice laid up in the right hand lay around semi-conductive filler centre .
Internal sheath	Poly-chloroprene thermosetting compound type RS 6 comply to SANS 1411-3 .
Reinforcing braid	An open nylon braid . Minimum 16 of nylon strings .
Outer sheath	Poly-chloroprene thermosetting compound type RS 6 comply to SANS 1411-3 . Inner and outer sheath are bonded to provide proper torsional protection , black .
Physical Properties	As per Table 1.
Electrical Properties	As per Table 2.
Tests	SANS 1520-2 .
Marking	Legible and indelible embossing as per order. Standard marking : TF KABLE 3 Texoprene TR 66 ECC (size) (voltage) CR SANS 1520-2 (Year) + metre marking

FEATURES
<ul style="list-style-type: none"> ▪ Excellent flexibility . ▪ Abrasion , tear resistant and flame retardant . ▪ Temperature range : min. ambient temp . -25 °C , max. conductor temp. 90°C. ▪ UV ,sunlight , ozone ,oil, resistant .

APPLICATIONS
<ul style="list-style-type: none"> ▪ Electrically driven machines , movable electric apparatus in hazardous areas, portable electric apparatus . Section feeders . Open cast mining , medium sized draglines , shovels and drills. Suitable for reeling purposes. ▪ Other industrial applications .

TYPE 66ECC 3,8/6,6 kV

SANS 1520-2



Length cable packing 300 m on drums. Other forms of packing and delivery are available on request

Table 1

Physical Properties

Physical Properties										
Power cores										
Conductor sizes	(mm ²)	25	35	50	70	95	120	150	185	240
Maximum wire diameter	(mm)	0.41	0.41	0.41	0.51	0.51	0.51	0.51	0.51	0.51
Approx. conductor diameter	(mm)	6.8	8.5	10.3	11.9	13.5	15.5	17.3	20.2	22.9
Maximum screen wire diameter	(mm)	0.31	0.31	0.31	0.31	0.31	0.31	0.31	0.31	0.31
Braided screen filling factor	(%)	60	60	60	60	60	60	60	60	60
Approx. summarized screen cross-section for power cores (weighing method)	(mm ²)	28	29	32	35	39	41	44	47	50
Pilot cores										
Conductor sizes	(mm ²)	10	10	10	16	16	16	25	25	25
Maximum wire diameter	(mm)	0.41	0.41	0.41	0.41	0.41	0.41	0.41	0.41	0.41
Approx. conductor diameter	(mm)	4.2	4.2	4.2	5.3	5.3	5.3	6.8	6.8	6.8
ECC size	(mm ²)	16	25	25	35	50	70	95	95	120
ECC maximum wire diameter	(mm)	0.41	0.41	0.41	0.41	0.41	0.51	0.51	0.51	0.51
Lay Ratio (maximum)	(x PCD)	20	20	20	20	20	20	20	20	20
Approximate cable diameter *	(mm)	50.1	51.7	55.3	59.8	64.6	68.8	73.1	77.8	82.5
Cable mass (approximate)										
Type 66 ECC	(kg/m)	3.9	4.4	5.5	6.4	7.6	8.9	10.5	11.9	14.5
Minimum bending radius	(mm)	430	450	480	520	550	590	650	670	740
Maximum recommended tension	(kN)	1.1	1.6	2.3	3.2	4.3	5.4	6.8	8.3	10.8

* Tolerance - ±3% of approx. value

TYPE 66ECC 3,8/6,6 kV

SANS 1520-2

POWERMITE

Table 2

Electrical Properties										
Power cores										
Maximum cond. DC resistance @ 20 ^o C (Ω/km)	0.795	0.565	0.393	0.277	0.210	0.164	0.132	0.108	0.0817	
Maximum cond. DC resistance @ 90 ^o C (Ω/km)	1.05	0.749	0.521	0.368	0.279	0.218	0.176	0.145	0.110	
Reactance (Ω/km)	0.124	0.116	0.109	0.105	0.101	0.096	0.092	0.091	0.087	
Impedance (Z) @ 90 ^o C (Ω/km)	1.06	0.758	0.532	0.383	0.297	0.238	0.199	0.171	0.140	
Minimum combined screen resistance @ 23 ^o C (Ω/km)	1.6	1.2	0.8	0.7	0.6	0.6	0.6	0.6	0.6	
Minimum combined screen & ECC resistance (Ω/km)	0.7	0.5	0.5	0.4	0.3	0.23	0.18	0.18	0.15	
Sustained current rating @ 30 ^o C ambient										
Laid out straight (A)	105	130	160	195	230	260	300	340	400	
Short circuit rating :										
Symmetrical fault current (kA for 1 sec)	3.1	4.3	6.1	8.5	11.6	14.6	18.3	23	29	
Earth fault current (screens) (kA for 1 sec)	1.6	2.1	3.1	3.5	4.1	4.1	4.1	4.1	4.1	
Earth fault current ECC + screens) (kA for 1 sec)	3.6	5.0	5.0	7.5	9.0	11.5	14.0	14.0	17.0	

All the information contained in this document - including tables and diagrams - is given in good faith and believed to be correct at the time of publication. The information does not constitute a warranty nor representation for which POWERMITE assumes legal responsibility. POWERMITE reserves rights to introduce changes to the document at any time.