
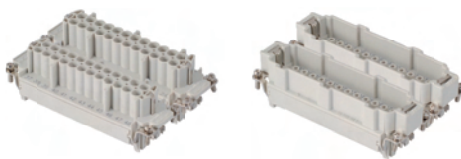







Series	S-EHV 16A 830V 8kV 3		UL US (UL,CSA), CE (RoHS)	
No. of poles	12(6x2)p + ⊕ +4p		20(10x2)p + ⊕ +4p	
Electrical characteristics according to EN61984 UL/CSA 600V-UL1977				
Size	32B «77x62»		48B «104x62»	
Terminal	Crimp		Crimp	
Wire section mm²/AWG	0,14 ÷ 4 / 26-12		0,14 ÷ 4 / 26-12	
Numbering	1-16	17-32	1-24	25-48
Female insert	7506.6072.0	7506.6082.0	7510.6073.0	7510.6083.0
Male insert	7506.6172.0	7506.6182.0	7510.6173.0	7510.6183.0
Series	S-ESHV 16A 830V 8kV 3			UL US (UL,CSA), CE (RoHS)
No. of poles	3p + ⊕ +2p	6p + ⊕ +2p	10p + ⊕ +2p	
Electrical characteristics according to EN61984 UL/CSA 600V-UL1977				
<i>New</i>				
Size	10B «57x27»	16B «77x27»	24B «104x27»	
Terminal	Spring	Spring	Spring	
Wire section mm²/AWG	0,14 ÷ 2,5 / 26-14	0,14 ÷ 2,5 / 26-14	0,14 ÷ 2,5 / 26-14	
Numbering	1-10	1-16	1-24	
Female insert	7503.5831.0	7506.5832.0	7510.5833.0	
Male insert	7503.5931.0	7506.8932.0	7510.5933.0	
Series	S-ESHV 16A 830V 8kV 3			UL US (UL,CSA), CE (RoHS)
No. of poles	12(6x2)p + ⊕ +4p		20(10x2)p + ⊕ +4p	
Electrical characteristics according to EN61984 UL/CSA 600V-UL1977				
<i>New</i>				
Size	32B «77x62»		48B «104x62»	
Terminal	Spring		Spring	
Wire section mm²/AWG	0,14 ÷ 2,5 / 26-14		0,14 ÷ 2,5 / 26-14	
Numbering	1-16	17-32	1-24	25-48
Female insert	7506.5832.0	7506.5834.0	7510.5833.0	7510.5835.0
Male insert	7506.5932.0	7506.5934.0	7510.5933.0	7510.5935.0
Series	S-HSB 35A 830V 6kV 3		UL US (UL,CSA), CE (RoHS)	
No. of poles	6p + ⊕	6p + ⊕	12p + ⊕	
Electrical characteristics according to EN61984 UL/CSA 600V-UL1977				
Size	16B «77x27»	16B «77x27»	32B «77x62»	
Terminal	Screw	Screw	Screw	
Wire section mm²/AWG	1,5 ÷ 6 / 16-10	1,5 ÷ 6 / 16-10	1,5 ÷ 6 / 16-10	
Numbering	1-6	1-6	1-6	7-12
Female insert	7306.6041.0	7306.6141.0	7306.6041.0	7306.6042.0
Male insert	A1308	A1301	A1308	7306.6142.0

