


ORDERING CODES FOR 400A, 600V POWER CONNECTORS

STOCK NO.	DESCRIPTION	COLOUR CODE	LINE	KEY
A1450	PANEL SOURCE	GREEN	E	1
A1451	PANEL SOURCE	BLACK	N	2
A1452	PANEL SOURCE	RED	1	3
A1453	PANEL SOURCE	YELLOW	2	4
A1454	PANEL SOURCE	BLUE	3	5
A1455	PANEL DRAIN	GREEN	E	1
A1456	PANEL DRAIN	BLACK	N	2
A1457	PANEL DRAIN	RED	1	3
A1458	PANEL DRAIN	YELLOW	2	4
A1459	PANEL DRAIN	BLUE	3	5
A1460	LINE SOURCE	GREEN	E	1
A1461	LINE SOURCE	BLACK	N	2
A1462	LINE SOURCE	RED	1	3
A1463	LINE SOURCE	YELLOW	2	4
A1464	LINE SOURCE	BLUE	3	5
A1465	LINE DRAIN	GREEN	E	1
A1466	LINE DRAIN	BLACK	N	2
A1467	LINE DRAIN	RED	1	3
A1468	LINE DRAIN	YELLOW	2	4
A1469	LINE DRAIN	BLUE	3	5
A1470	CONTACT REMOVAL TOOL			

16/32A SPLASHPROOF ISOLATOR SWITCH, IP65 3+4 POLE > MOULDED

AMPCO Isolater switches are compact, durable and very cost effective to disconnect or isolate motor circuits and upgrade facilities. Two different size enclosures are available.

ORDERING CODE	3 POLE	4 POLE
16A ORANGE	A2105	A2112
32A ORANGE	A2106	A2113
16A GREY	A2099	2097
32A GREY	A2100	A2098

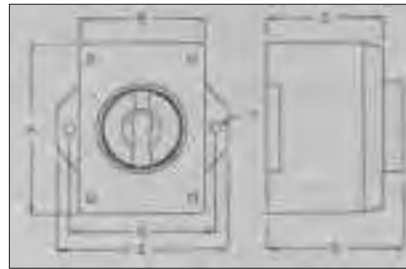

AMPERAGE	DIMENSIONS mm							WEIGHT gram
	A	B	C	D	E	F	G	
16A	120	80	85	100	112	6	91	350

The housings are moulded in Amplast, a high strength plastic with the following characteristics:

- Good electrical insulation
- High mechanical strength
- Wear resistant
- Abrasion resistant
- Dimensionally stable
- Self extinguishing
- Heat resistant
- Resistant to cold
- Resistant to ageing
- Seawater Resistant

- SPECIAL FEATURES:**
- One top, one bottom entry 20mm
 - Rigid enclosure
 - Ample space for wiring
 - Padlocking facilities
 - Housing in electric orange or grey

- TECHNICAL SPECIFICATIONS:**
- 16A 600V 3 phase 5kW AC23
 - 32A 600V 3 phase 10kW AC23
 - IP Rating: IP65