


**250/400A HEAVY DUTY WALL SOCKET, max.1000V, UNSWITCHED**  
 (Ext. on principles of CEE17)

Type	Contacts	Operating Voltage					Kg
		250V / 9h	380V / 6h	500V / 7h	660V / 5h	1000V / 1h	
JWU-S4 250A	3P+E	10.270.675	10.271.675	10.272.675	10.273.675	10.274.675	11.500
JWU-S5 250A	3P+N+E	10.275.675	10.276.675	10.277.675	10.278.675	10.279.675	12.000
JWU-S4 400A	3P+E	10.470.675	10.471.675	10.472.675	10.473.675	10.474.675	11.500
JWU-S5 400A	3P+N+E	10.475.675	10.476.675	10.477.675	10.478.675	10.479.675	12.000

DIMENSIONS: IN mm

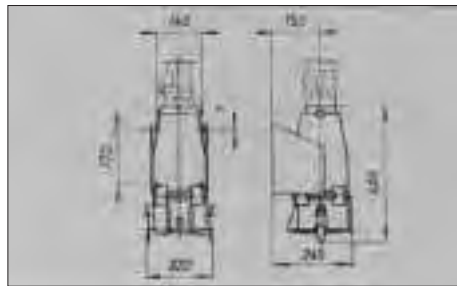

**250/400A HEAVY DUTY WALL SOCKET, max.1000V, SWITCHED AND INTERLOCKED**  
 (Ext. on principles of CEE17)

Type	Contacts	Operating Voltage					Kg
		250V / 9h	380V / 6h	500V / 7h	660V / 5h	1000V / 1h	
JW-S4 250A	3P+E	10.280.675	10.281.675	10.282.675	10.283.675	10.284.675	45.600
JW-S5 250A	3P+N+E	10.285.675	10.286.675	10.287.675	10.288.675	10.289.675	47.100
JW-S4 400A	3P+E	10.480.675	10.481.675	10.482.675	10.483.675	10.484.675	45.600
JW-S5 400A	3P+N+E	10.485.675	10.486.675	10.487.675	10.488.675	10.489.675	47.100

DIMENSIONS: IN mm

