


**IP44 ⚡ SPLASHPROOF APPLIANCE PLUGS, WALL MOUNTED - MOULDED**

A	V	⊕ 2P+E	⊕ 3P+E	⊕ 3P+N+E
16	230	A0416	335	341
	400	333	A0403	A0405
	500	—	A0404	A0402
32	230	A0417	347	353
	400	345	A0406	A0408
	500	—	A0407	2386


Amp.	16			32			
	Pole	3	4	5	3	4	5
Dimensions in mm	a	87	100	100	128	128	128
	b	64	75	75	84	84	84
	c	93	106	110	133	133	135
	d	40	—	—	—	—	—
	d1	—	10,5	10,5	11	11	11
	e	50,5	59	59	68	68	68
	f	4,5	5	5	5,3	5,3	5,3
	g	4	4	4	4	4	4
	h	122	133	135	169	169	170
	M	20	20	20	25	25	32
	M*	1xM20 (blind) to be cut out			2xM25 (blind) to be cut out		
	min. Cross Section (mm <sup>2</sup> )	1	1	1	2,5	2,5	2,5
	max. Cross Section (mm <sup>2</sup> )	2,5	2,5	2,5	6	6	6
max. cable diam. (mm)	15	15	15	18/25	18/25	18/25	

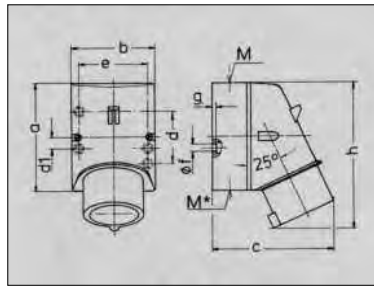

**IP67 ⚡ WATERTIGHT APPLIANCE PLUGS, WALL MOUNTED - MOULDED**

A	V	⊕ 2P+E	⊕ 3P+E	⊕ 3P+N+E
63	230	1107	356	360
	400	1217	A0409	A0411
	500	—	A0410	A0401
125	230	—	363	367
	400	—	A0412	A0414
	500	—	A0413	—

Amp.	63			125		
	Pole	3	4	5	4	5
Dimensions in mm	a	170	170	170	264	264
	b	118	118	118	163	163
	c	171	171	171	205	205
	d	136	136	136	240	240
	e	104	104	104	140	140
	f	6,1	6,1	6,1	8,1	8,1
	g	6	6	6	8	8
	h	250	250	250	355	355
	M	40	40	40	50	50
	M*	2x40	2x40	2x40	50	50
	α	25°	25°	25°	20°	20°
	min. Cross Section (mm <sup>2</sup> )	4	4	4	16	16
	max. Cross Section (mm <sup>2</sup> )	10	10	10	35	35
max. cable diam. (mm)	32	32	32	38	38	

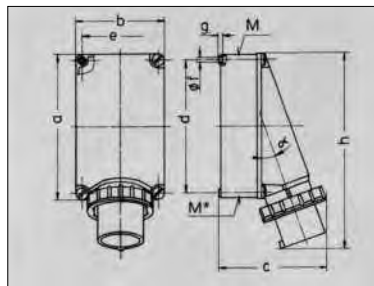

Note: All "A" numbers represent ex stock items. All other numbers are available on request.