





# 32A REFRIGERATED CONTAINER PLUGS AND SOCKETS, 380/440V > M

Earth contact in 3h position in accordance with international CEE Standard to IEC 60309-1+2,1999 Enclosure type 67


Nickel-plated contacts and fibreglass reinforced insert to contain in railway stations, ports, airports, general transport, extreme protection against corrosion and overheating. businesses, ware houses and ships. The reliable connection throughout the world. International transport of goods by land, sea, and air requires these plugs and sockets for containers. Typical applications are: Container terminals, loading and transfer

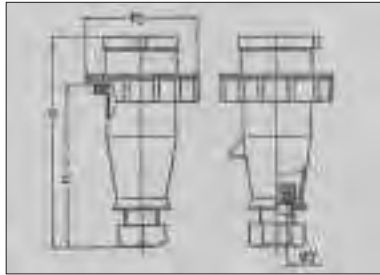


|               |                          |        |
|---------------|--------------------------|--------|
| IP 67 Plug    | Current                  | 32     |
| CAT NO. A0130 | Poles                    | 4      |
|               | Dimensions (mm)          | a 166  |
|               |                          | b 92   |
|               |                          | n 126  |
|               |                          | y 24,5 |
|               | min. Cond. Cross Section | 2,5    |
|               | max. Cond. Cross Section | mm 6   |

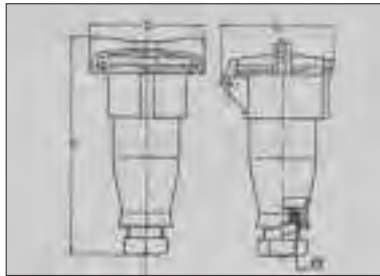


|                 |                          |        |
|-----------------|--------------------------|--------|
| IP 67 Connector | Current                  | 32     |
| CAT NO. A0522   | Poles                    | 4      |
|                 | Dimensions (mm)          | a 192  |
|                 |                          | b 102  |
|                 |                          | n 93   |
|                 |                          | y 24,5 |
|                 | min. Cond. Cross Section | 2,5    |
|                 | max. Cond. Cross Section | mm 6   |

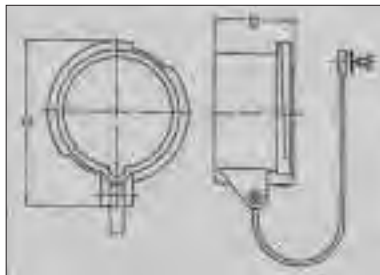

|                        |                 |      |
|------------------------|-----------------|------|
| IP 67 Protective Cover | Current         | 32   |
| CAT NO. 40841          | Poles           | 4    |
|                        | Dimensions (mm) | a 91 |
|                        |                 | b 51 |

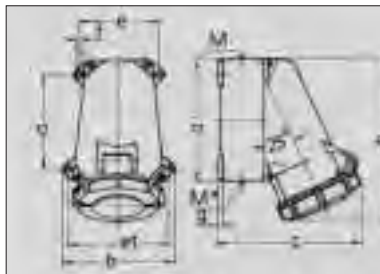

|  |                          |                           |
|--|--------------------------|---------------------------|
| IP 67 Socket Outlet  | Current                  | 32                        |
| with four external fixing holes with one cable entry at the top, and one dummy (can be cut out) at the bottom. | Poles                    | 4                         |
|  | Dimensions (mm)          | a 120                     |
|  |                          | b 112                     |
|  |                          | c 143                     |
|  |                          | d 90,2                    |
|  |                          | e 79                      |
|  |                          | el 98,5                   |
|  |                          | f 5,5                     |
|  |                          | g 5                       |
|  |                          | h 160                     |
|  | M                        | M 32                      |
|  | M*                       | M32 (blind) to be cut out |
|  | min. Cond. Cross Section | 2,5                       |
|  | max. Cond. Cross Section | mm 6                      |
|  | max. cable dia. in       | mm 25                     |

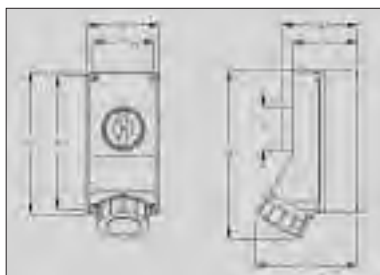

|   |                          |         |
|---|--------------------------|---------|
| IP 67 Socket Outlet, switched, with mechanical dual interlock | Current                  | 32      |
| CAT NO. A0618   | Poles                    | 4       |
|   | Dimensions (mm)          | a 122   |
|   |                          | b 225   |
|   |                          | c 155   |
|   |                          | d 275   |
|   |                          | e 208   |
|   |                          | f 101   |
|   |                          | g 140   |
|   |                          | h 116   |
|   |                          | l 70    |
|   | min. Cond. Cross Section | 2,5     |
|   | max. Cond. Cross Section | mm 6    |
|   | max. cable dia. in       | mm 20,5 |

Continued on next page  
 Note: All A numbers are available ex stock, other numbers are available on request.