




**IP44 ▲ SPLASHPROOF CONNECTOR (COUPLER) – MOULDED**

A	V	⊕ 2P+E	⊕ 3P+E	⊕ 3P+N+E
16	■ 230	A0503	513	519
	■ 400	511	A0504	A0521
	■ 500	—	A0505	A0528
32	■ 230	A0532/A0506	525	531
	■ 400	523	A0531/A0507	A0529
	■ 500	—	A0508	2027

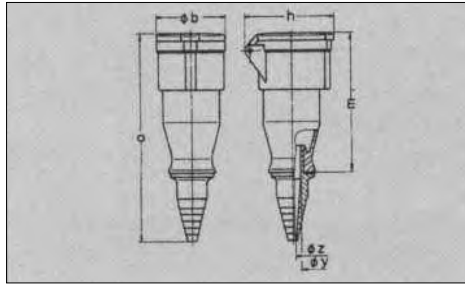


Amp.	16			32			
	Pole	3	4	5	3	4	5
Dimensions in mm	a	155	177	177	225	225	225
	b	51	58	66	66	66	73
	h	69	77	85	88	88	95
	m	115	124	124	150	150	150
	y	14	17,5	17,5	24	24	24
	z	6	7,5	7,5	10	10	10

**IP44 ▲ SPLASHPROOF CONNECTOR (COUPLER), ANGLED – MOULDED**

A	V	⊕ 2P+E
16	■ 230	A0500


Note: This coupler is mainly used on caravans together with cara-contact outlet NoA0415. See page 95 of this catalogue.

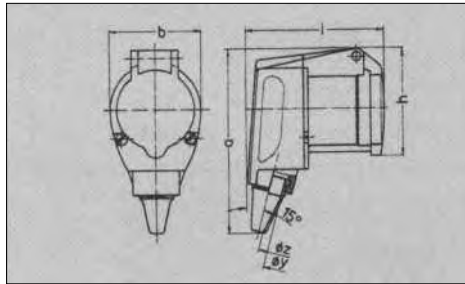

Amp.	16	
Pole	3	
Dimensions in mm	a	118
	b	59
	h	69
	i	88
	y	17,5
	z	7

**IP67 ●● WATERTIGHT, CONNECTOR (COUPLER) - MOULDED**

A	V	⊕ 2P+E	⊕ 3P+E	⊕ 3P+N+E
16	■ 230	A0523	3873	3883
	■ 400	3862	A0509	A0525
	■ 500	—	3872	—
32	■ 230	3888	3899	3909
	■ 400	3891	A0524	A0526
	■ 500	—	3898	—

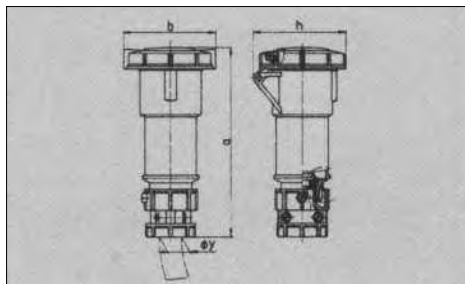

Amp.	16			32			
	Pole	3	4	5	3	4	5
Dimensions in mm	a	171	182	194	217	217	229
	b	78	85	96	103	103	110
	h	79	88	95	99	99	105
	y	19	19	22	24,5	24,5	28,5

Note: All "A" numbers represent ex stock items. All other numbers are available on request. Other voltages are also available on request.