




63/125A SPLASHPROOF ISOLATOR SWITCH IP65, 3 + 4 POLE > METAL

DIMENSIONS: INmm

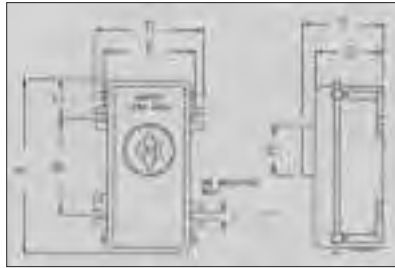

ORDERING CODE	3 POLE	4 POLE
63A	A2107	A2114
125A	A2108	A2115

Amps	A	B	C	D	E	F	G	H	I	Weight/kg
63	310	170	70	185	165	157	137	75	M8	3,3
125	325	210	55	225	195	190	165	75	M8	4,5

AMPCO ISOLATOR SWITCHES ARE COMPACT, DURABLE AND VERY COST EFFECTIVE TO DISCONNECT OR ISOLATE MOTOR CIRCUITS AND UPGRADE FACILITIES. THE HOUSING IS MADE OF CAST ALUMINIUM AND IS ORANGE POWDER COATED, ALL SCREWS ARE CADMIUM PLATED.

SPECIAL FEATURES:

- One top, one bottom entry
- Rigid enclosure
- Housing in electric orange

- Ample space for wiring
- Padlocking facilities

TECHNICAL SPECIFICATIONS:

- 63A 500V 30kW AC23
- 125A 500V 55kW AC23
- IP Rating: IP65

250A SPLASHPROOF ISOLATOR SWITCH IP65, 3 + 4 POLE > METAL

DIMENSIONS: INmm



ORDERING CODE	3 POLE	4 POLE
250A	A2109	A2116

WEIGHT: 13,5kg

AMPCO ISOLATOR SWITCHES ARE COMPACT, DURABLE AND VERY COST EFFECTIVE TO DISCONNECT OR ISOLATE MOTOR CIRCUITS AND UPGRADE FACILITIES. THE HOUSING IS MADE OF CAST ALUMINIUM AND IS ORANGE POWDER COATED, ALL SCREWS ARE CADMIUM PLATED.

SPECIAL FEATURES:

- One top, one bottom entry
- Rigid enclosure
- Housing in electric orange


- Ample space for wiring
- Padlocking facilities

TECHNICAL SPECIFICATIONS:

- 250A 500V 130kW AC23
- IP Rating: IP65

250A SPLASHPROOF ISOLATOR SWITCH IP65, 3 + 4 POLE > METAL

DIMENSIONS: INmm

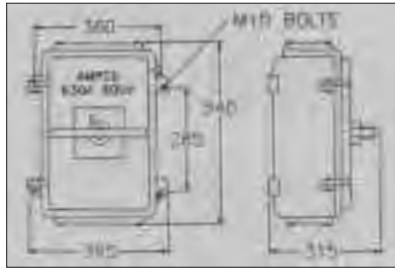

ORDERING CODE	3 POLE	4 POLE
400A	A2110	A2117
630A	A2111	A2118

WEIGHT: 13,5kg

AMPCO ISOLATOR SWITCHES ARE COMPACT, DURABLE AND VERY COST EFFECTIVE TO DISCONNECT OR ISOLATE MOTOR CIRCUITS AND UPGRADE FACILITIES. THE HOUSING IS MADE OF CAST ALUMINIUM AND IS ORANGE POWDER COATED, ALL SCREWS ARE CADMIUM PLATED.

SPECIAL FEATURES:

- One top, one bottom entry
- Rigid enclosure
- Housing in electric orange

- Ample space for wiring
- Padlocking facilities

TECHNICAL SPECIFICATIONS:

- 250A 500V 130kW AC23
- IP Rating: IP65