




IP44 ▲ SPLASHPROOF, ANGLED PANEL MOUNT SOCKET – MOULDED


A	V	⊕ 2P+E	⊕ 3P+E	⊕ 3P+N+E
16	■ 230	A0301	1466	1472
	■ 400	1464	A0302	A0304
	■ 500	—	A0303	A0309
32	■ 230	A0305	1495	1499
	■ 400	1493	A0306	A0308
	■ 500	—	A0307	A0323

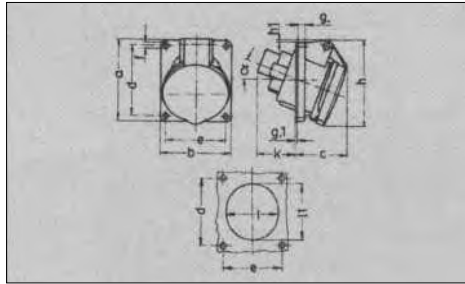

Amp.	16			32			
	Pole	3	4	5	3	4	5
Dimensions in mm	a	73,5	100	100	100	100	100
	b	64	92	92	92	92	92
	c	52	58	58	62	62	62
	d	60	85	85	85	85	85
	e	52	77	77	77	77	77
	f	5,3	5,3	5,3	5,3	5,3	5,3
	g	7	8	8	8	8	8
	g.l	2	2	2	2	2	2
	h	79	105	105	107	107	112
	h.l	1	-	-	-	-	-
	k	41	41	41	51	51	52
	l	52	60	65	70	70	73
	ll	60	65	72	82	82	85
	α	20°	20°	20°	20°	20°	20°
	min. Cross Section (mm²)	1,5	1,5	1,5	2,5	2,5	2,5
	max. Cross Section (mm²)	4	4	4	10	10	10

IP44 ▲ SPLASHPROOF, STRAIGHT PANEL MOUNT SOCKET – MOULDED

A	V	⊕ 2P+E	⊕ 3P+E	⊕ 3P+N+E
16	■ 230	A0321	1389	1386
	■ 400	1367	A0324	A0325
	■ 500	—	1391	—
32	■ 230	1395	1398	3454
	■ 400	1396	1399	A0327
	■ 500	—	1400	3452

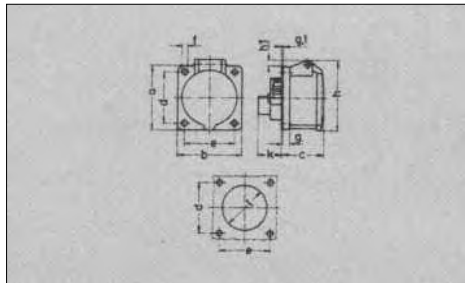

Amp.	16			32			
	Pole	3	4	5	3	4	5
Dimensions in mm	a	75	75	75	75	75	75
	b	75	75	75	75	75	75
	c	54	54	54	64	64	64
	d	60	60	60	60	60	60
	e	60	60	60	60	60	60
	f	5,5	5,5	5,5	5,5	5,5	5,5
	g	8	8	8	8	8	8
	g.l	2	2	2	2	2	2
	h	68	77	85	89	89	95
	h.l	1	5	9	12	12	12
	k	28	28	28	32	32	32
	l	50	52	57	62	62	65
	min. Cross Section (mm²)	1,5	1,5	1,5	2,5	2,5	2,5
	max. Cross Section (mm²)	4	4	4	10	10	10

Note: All "A" numbers represent ex stock items. All other numbers are available on request. Other voltages and straight panel mount sockets are also available on request.