


IP44 ▲ SPLASHPROOF PLUG – MOULDED

A	V	⊕ 2P+E	⊕ 3P+E	⊕ 3P+N+E
16	■ 110	A0104	250	256
	■ 230	A0105	251	257
	■ 400	249	A0140	A0133
	■ 500	—	A0107	A0101
32	■ 110	259	262	268
	■ 230	A0138	263	269
	■ 400	261	A0136	A0135
	■ 500	—	A0110	A0102


Amp.	16			32			
	Pole	3	4	5	3	4	5
Dimensions in mm	a	145	169	169	213	213	214
	b	52	59	67	71	71	77
	n	59	66	73	83	83	90
	m	106	116	116	141	141	141
	n	108	132	132	168	168	168
	y	14	16,5	16,5	24	24	24
	z	6	7,5	7,5	7	7	7

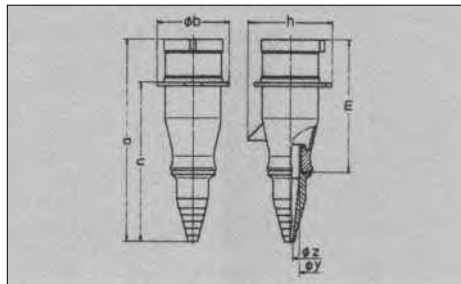


IP67 ▼ WATER TIGHT PLUG - MOULDED

A	V	⊕ 2P+E	⊕ 3P+E	⊕ 3P+N+E
16	■ 110	3794	3807	3819
	■ 230	A0111	3811	3823
	■ 400	3799	A0112	A0113
	■ 500	—	A0132	—
32	■ 110	3829	3839	3851
	■ 230	3830	3844	3855
	■ 400	3832	A0114	A0116
	■ 500	—	3842	—
63	■ 110	1570	1108	1112
	■ 230	1571	1109	1113
	■ 400	1572	A0117	A0134
	■ 500	—	A0118	A0103
125	■ 110	3399	1441	1445
	■ 230	3400	1442	1446
	■ 400	—	A0120	A0122
	■ 500	—	A0121	A0099

Amp.	16			32			
	Pole	3	4	5	3	4	5
Dimensions in mm	a	162	172	186	199	199	213
	b	71	79	89	95	95	102
	y	19	19	22	24,5	24,5	28,5

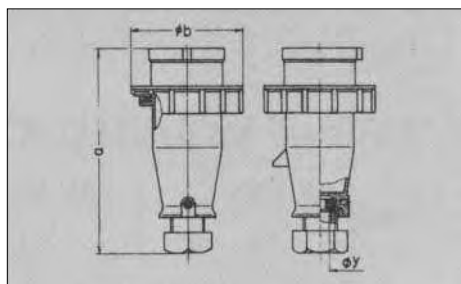

Amp.	63			125			
	Pole	3	4	5	3	4	5
Dimensions in mm	a	246	246	246	293	293	293
	b	114	114	114	131	131	131
	y	36	36	36	50	50	50

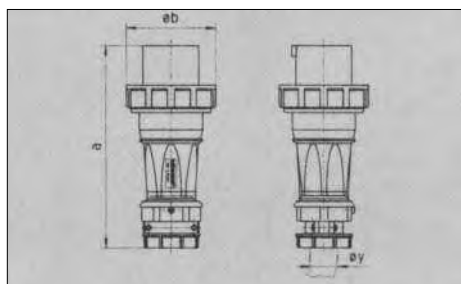

Electronic Earthleakage Test Plugs

63A4P380V	CAT A 0149
63A4P500V	CAT A 0150

Picture, see page 100

Note: All "A" numbers represent ex stock items. All other numbers are available on request.