

# VALVE CONNECTORS - NUMBER OF CONTACTS 2+PE, 3+PE, 2+2PE

DIN 43 650, ISO 6952 and industrial version



Contact Configuration

### Product Range


- Type A and B
- All types are available as field attachable, prewired or overmoulded versions
- More than 80 different circuits utilising Diodes, Zener-Diodes, bridge-rectifier, LED or varistors
- Cable with diameters up to  $\varnothing$  8mm PG 9, up to  $\varnothing$  10mm PG 11 and single wires (i.e. 3 x  $\varnothing$  2,2mm) can be used
- All connectors, if self assembled or prewired or overmoulded are sealed to IP65

### Materials


Insulation body:	Thermoplastic resin PA 6,6
Contacts:	Copper alloy, hard silver plated
Hoods:	Thermoplastic resin PA 6,6
Seals:	Elastomere, light and oil resistant
Rated current:	1 -10A
Rated voltage:	24 - 230V AC
Protection class:	IP 65 DIN 40050
Screw termination:	0,5 - 1,5mm <sup>2</sup>

Type A



Type B




Industrial Version



3 + PE

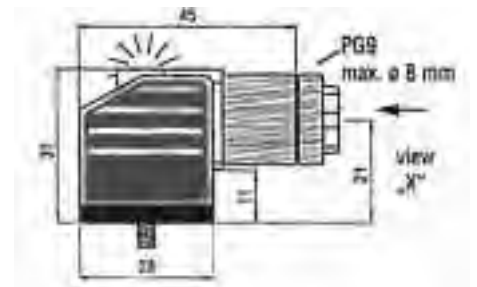

DIN Version



2 + 2 PE



2 + PE

Please ask our sales staff for detailed catalogues with codes on how to order.

**DIMENSIONS: IN mm**