




IP67 **WATERTIGHT, DISCONNECTOR WALL MOUNTED SOCKET OUTLET -**

A	V	2P+E	3P+E	3P+N+E
16	24	3PS1WA+1D20E08	—	—
	220	3PS1WA+1D20E03	3PS1WA+1D30E03	3PS1WA+1D3NE03
	380	A1106	A1115	A1119
	660	—	3PS1WA+1D30E19	3PS1WA+1D3NE19
	250DC	3PS1WA+1D20E20	—	—
32	24	3PS3WA+3D20E08	—	—
	220	3PS3WA+3D20E03	3PS3WA+3D30E03	3PS3WA+3D3NE03
	380	A1986	A1984	A1989
	660	—	3PS3WA+3D30E19	3PS3WA+3D3NE19
	250DC	3PS3WA+3D20E20	—	—
63	24	3PS6WA+6D20E08	—	—
	220	3PS6WA+6D20E03	3PS6WA+6D30E03	3PS6WA+6D3NE03
	380	A1974	A0141	A0142
	660	—	3PS6WA+6D30E19	3PS6WA+6D3NE19
	250DC	3PS6WA+6D20E20	—	—
125	24	3PS9WA+9D20E08	—	—
	220	3PS9WA+9D20E03	3PS9WA+9D30E03	3PS9WA+9D3NE03
	380	3PS9WA+9D20E01	A3151	A3152
	660	—	3PS9WA+9D30E19	3PS9WA+9D3NE19
	250DC	3PS9WA+9D20E20	—	—
200	24	3PS2WA+2D20E08	—	—
	220	3PS2WA+2D20E03	3PS2WA+2D30E03	3PS2WA+2D3NE03
	380	3PS2WA+2D20E01	3PS2WA+2D30E01	A0901
	660	—	A3111	3PS2WA+2D3NE19
	250DC	3PS2WA+2D20E20	—	—

DIMENSIONS: IN mm

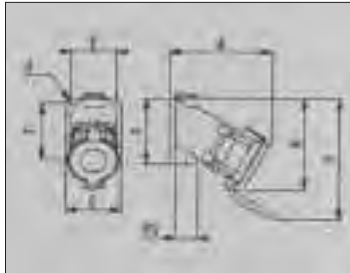


AMPS	A	B	C	d	E	E1	F	Y	kg	Cable entry
										ISO
16	135	122	82	6,5	70	70	82	180	0,31	M20x1,5
32	155	141	89	6,5	77	88	100	210	0,50	M25x1,5
63	200	180	105	7,5	89	112	128	265	0,88	M40x1,5
125	300	390	250	10	210	260	295	290	-	M50x1,5
200	310	370	250	10	210	260	295	270	-	M63x1,5

IP67 **WATERTIGHT, DISCONNECTOR CABLE CONNECTOR (COUPLER) - MOULDED**

A	V	2P+E	3P+E	3P+N+E
16	24	3PS1C20E08	—	—
	220	3PS1C20E03	3PS1C30E03	3PS1C3NE03
	380	A0139	A0137	A3153
	660	—	3PS1C30E19	3PS1C3NE19
	250DC	3PS1C20E20	—	—
32	24	3PS3C20E08	—	—
	220	3PS3C20E03	3PS3C30E03	3PS3C3NE03
	380	A3156	A3157	A3158
	660	—	3PS3C30E19	3PS3C3NE19
	250DC	3PS3C20E20	—	—
63	24	3PS6C20E08	—	—
	220	3PS6C20E03	3PS6C30E03	3PS6C3NE03
	380	A3159	A3160	A1808
	660	—	3PS6C30E19	3PS6C3NE19
	250DC	3PS6C20E20	—	—
125	24	3PS9C20E08	—	—
	220	3PS9C20E03	3PS9C30E03	3PS9C3NE03
	380	3PS9C20E01	A1801	A1810
	660	—	3PS9C30E19	3PS9C3NE19
	250DC	3PS9C20E20	—	—
200	24	3PS2C20E08	—	—
	220	3PS2C20E03	3PS2C30E03	3PS2C3NE03
	380	3PS2C20E01	3PS2C30E01	A3155
	660	—	A3154	3PS2C3NE19
	250DC	3PS2C20E20	—	—

Note: Disconnectors are also available with 2 additional pilot contacts (max 16A). Other voltages as per schedule are also available. All "A" numbers represent ex stock items. All other numbers are available on request.

DIMENSIONS: IN mm

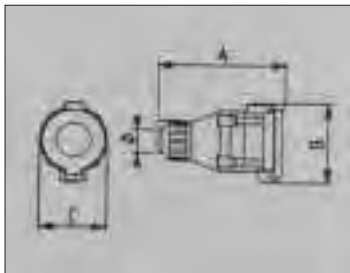

AMPS	A	B	C	Ø	kg
16	150	92	69	18	0,30
32	170	103	80	22	0,47
63	196	119	96	29	0,79
125	240	138	113	45	1,90
200	260	165	130	58	3,15