






IP67  WATERTIGHT, DUAL INTERLOCKED SWITCH SOCKET WITH INTEGRATED ISOLATOR AND NO VOLT RELAY, ECONOMY RANGE, TYPE EURONORM - MOULDED

A	V	 3P+E	 3P+N+E	WEIGHT KG
63	 400	3137	3138	3,5
	 500	3139	A3140	3,5

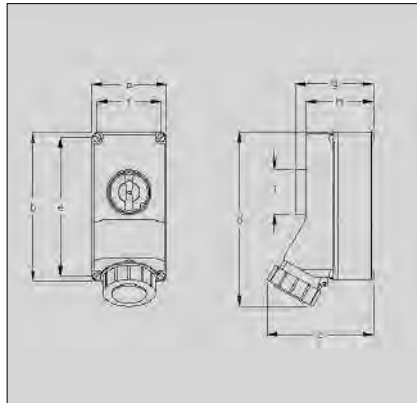

POLES	a	b	c	d	e	f	g	h	l	
16A	2P+E	122	225	155	275	208	101	140	116	70
	3P+E	122	225	155	275	208	101	140	116	70
	3P+N+E	122	225	155	275	208	101	140	116	70
32A	2P+E	122	225	155	275	208	101	140	116	70
	3P+E	122	225	155	275	208	101	140	116	70
	3P+N+E	122	225	155	275	208	101	140	116	70
63A	3P+E	150	300	205	345	280	130	157	136	90
	3P+N+E	150	300	205	345	280	130	157	136	90

Features

- One top and two bottom entries (32mm) (Entries can be reversed)
- Protection class (IP67 Outdoor use)
- Electrical interlocking
- Lockable with padlock in off position in accordance with the OHS Act No. 6-1983 as amended (padlock optional)
- The housing consists of AMPLAST, a thermo plastic material, combining shape consistency with excellent electrical insulation properties. AMPLAST is low toxic, flame retardant and highly resistant to abrasion, heat, frost, ageing, oil, petrol and sea water. It is tough, dimensionally stable and virtually unbreakable
- Onload isolator with integrated no volt relay (socket will trip on power failure and will not switch on automatically once power resumes)
- All contacts are manufactured of brass and female contacts are spring loaded for better heat dissipation
- Inserts made of plastic and are virtually unbreakable
- Mounting dimensions are placed inside the socket enclosure, as well as at the back of the socket base
- Competitive pricing due to South African manufacture
- Packing: 1 off socket per carton (plug not included)