




IP67 ☔☔ WATERTIGHT, DUAL SWITCHED INTERLOCKED SOCKET –

A	V	⊕ 3P+E	⊕ 3P+N+E
125	■ 400 ■ 500	A1100 A1102	A1105 A1133

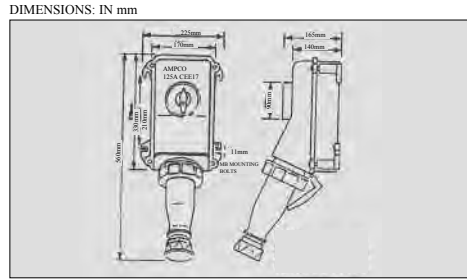


WEIGHT:
 SOCKET 5,8 kg
 PLUG PVC 1,1 kg
 PLUG METAL 1,3 kg

Round type sockets, mechanically interlocked, with on-load isolator. Housing made of sand cast aluminium. Housing is epoxy powder coated, to give an attractive appearance and a lasting finish, even in coastal atmospheres. All springs and screws are cadmium plated. Inserts manufactured of brass,

inserted into Amaplast insulation (unbreakable and heat resistant). Switch socket is watertight IP67 for outdoor installation. One bottom and top entry (40 mm) is provided for easy cable conduit termination.

IP67 ☔☔ WATERTIGHT, SWITCHED DUAL INTERLOCKED SOCKET – METAL – WITH INTEGRATED CIRCUIT BREAKER (100A)

A	V	⊕ 3P+E	⊕ 3P+N+E
125	■ 400 ■ 500	A1101 A1104	A1107 ON REQUEST

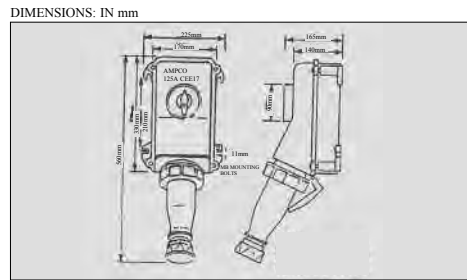

WEIGHT:
 SOCKET 7 kg
 PLUG PVC 1,1 kg
 PLUG METAL 2,5 kg


Round type sockets, mechanically interlocked, with circuit breaker (100A 5KA). Housing made of sand cast aluminium. Housing is epoxy powder coated, to give an attractive appearance and a lasting finish, even in coastal atmospheres. All springs and screws are cadmium plated. Inserts manufactured of brass, inserted into Amaplast insulation

(unbreakable and heat resistant). Switch socket is watertight IP67 for outdoor installation. One bottom and top entry (40 mm) is provided for easy cable conduit termination.

IP67 ☔☔ WATERTIGHT, SWITCHED DUAL INTERLOCKED SOCKET – METAL – WITH INTEGRATED EARTH LEAKAGE

A	V	⊕ 3P+E	⊕ 3P+N+E
125	■ 400 ■ 500	A2900 A2902	A2901 ON REQUEST

WITH SWITCHED EARTH LEAKAGE AS ENFORCED BY THE OHS ACT AND SABS (SEE PAGE 13)

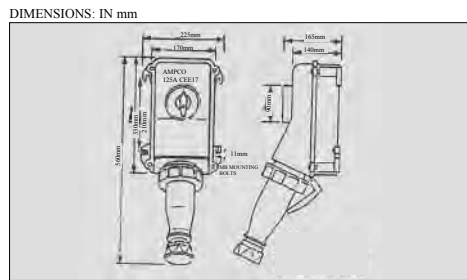

WEIGHT:
 SOCKET 7 kg
 PLUG PVC 1,1 kg
 PLUG METAL 2,5 kg

The AMPCO round type sockets are mechanically interlocked with an earth leakage unit of 125A 30mA, 10 kA at 380 V and 3 kA at 500 V rupturing capacity. The housing is made of sand cast aluminium and is epoxy powder coated in electric orange to give an attractive appearance and a lasting finish, even in coastal atmospheres. All springs and screws are

cadmium plated. Inserts manufactured of brass, inserted in Amaplast insulation (unbreakable and heat resistant). Switch socket is watertight IP67 for outdoor installation. One bottom and top entry (40 mm) is provided for easy cable or conduit termination.