




**IP44 ▲ SPLASHPROOF, SWITCHED DUAL INTERLOCKED SOCKET –**

A	V	⊕ 3P+E	⊕ 3P+N+E
63	<div style="display: flex; align-items: center;"> <div style="width: 10px; height: 10px; background-color: red; margin-right: 5px;"></div> 400  <div style="width: 10px; height: 10px; background-color: black; margin-right: 5px; margin-left: 5px;"></div> 500                 </div>	A1109 A1114	A1118 A1123



DIMENSIONS: IN mm

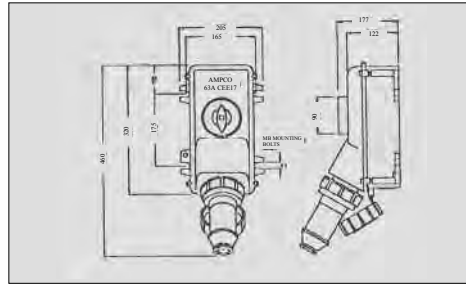

WEIGHT:

SOCKET	5,8 kg
PLUG PVC	0,65 kg
PLUG METAL	1,3 kg

Round type sockets, mechanically interlocked, with on-load isolator. Housing made of high pressure die cast aluminium. Housing is epoxy powder coated in electric orange, to give an attractive appearance and a lasting finish, even in coastal atmospheres. All springs and screws are cadmium plated. Inserts manufactured of brass, inserted into Amaplast


insulation (unbreakable and heat resistant). Switch socket splash proof protected for outdoor installation (IP44). One bottom and top entry (32mm) is provided for easy cable or conduit termination.

**IP44 ▲ SPLASHPROOF, DUAL INTERLOCKED SOCKET – METAL WITH INTEGRATED CIRCUIT BREAKER**

A	V	⊕ 3P+E	⊕ 3P+N+E
63	<div style="display: flex; align-items: center;"> <div style="width: 10px; height: 10px; background-color: red; margin-right: 5px;"></div> 400  <div style="width: 10px; height: 10px; background-color: black; margin-right: 5px; margin-left: 5px;"></div> 500                 </div>	A1110 A1116	A1120 -



DIMENSIONS: IN mm

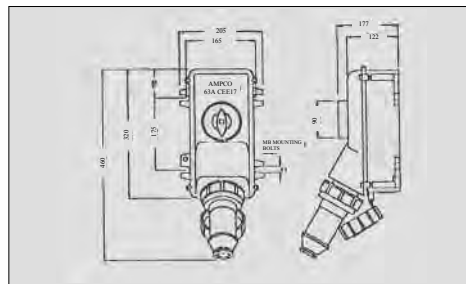

WEIGHT:

SOCKET	5,8 kg
PLUG PVC	0,65 kg
PLUG METAL	1,3 kg

Round type sockets, mechanically interlocked, with circuitbreaker 60A 5kA. Housing made of high pressure die cast aluminium. Housing is epoxy powder coated, to give an attractive appearance and a lasting finish, even in coastal atmospheres. All springs and screws are cadmium plated. Inserts manufactured of brass, inserted into Amaplast insulation (unbreakable and

heat resistant). Switch socket splashproof protected for outdoor installation. One bottom and top entry (32mm) is provided for easy cable or conduit termination.

NOTE:  
ALL SWITCH SOCKETS ARE AVAILABLE WITH ELECTRICAL INTERLOCK AND UNDERVOLTAGE RELAY. THIS CAN PREVENT AUTOMATIC RECONNECTION AFTER POWER FAILURE.

**Note:** If a watertight IP67 plug is inserted into an IP44 Splashproof socket and properly locked with locking ring the plug and socket combination will become watertight IP67.