



SUITABLE FOR ROUND AND FLAT CABLES, HOSES, CURTAINS AND OTHER APPROPRIATE MATTER


HEAVY DUTY FESTOON SY

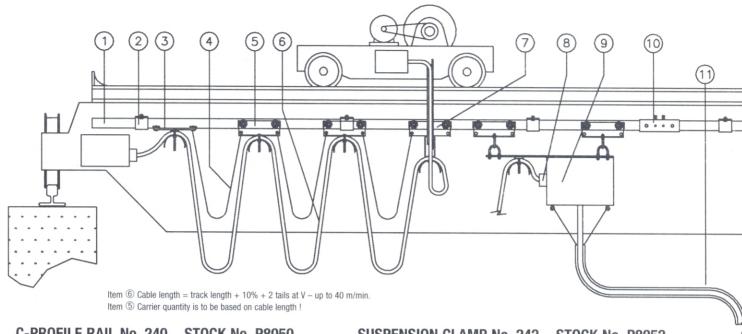


C-PROFILE RAIL No. 240 STOCK No. P8050




SUSPENSION CLAMP No. 242 **STOCK No. P8052**



RAIL JOINT No. 241 STOCK No. P8051



MOBILE BOX No. 151 STOCK No. P6627




The Festooning arrangements, as depicted above, are showing all parts normally requi with all varieties of energy i.e. electric

Our Parts Display above consists of:

- 1. C-Rail, galvanised
- 2. Suspension clamp, galvanised
- 3. FL-End clamp, coated
- 4. Towing rope
- 5. FL-Cable carrier, coated
- 6. * Flat cable TPLF/TF to suit spec. In required lengths
- 7. FL-Master carrier, coated
- 8. Flat cable gland to suit Item 6
- 10. Rail joint, galvanised

- No. 240 Stock No. P8050
- No. 242 Stock No. P8052
- No. 252 Stock No. P8055
- In required lengths
- No. 250 Stock No. P8053
- No. 251 Stock No. P8054
- In required quantities
- 9. Mobile box to suit FL & RD cable No. 152 Stock No. P6627
 - No. 241 Stock No. P8051

other ENERGY SUPPLY SYSTEM P





Energy drag chains to carry cable & hoses




Couplers for flexible cable


N.B. Cable Carrier No. 250 can carry 30 kg of load - parking space equals 160 mm x no. of carriers - approx

As this Festooning is used in a variety of applications and environments, which require special designs and particular material, PO Please let us attend to your special

STEM 240/250 AT ITS BEST

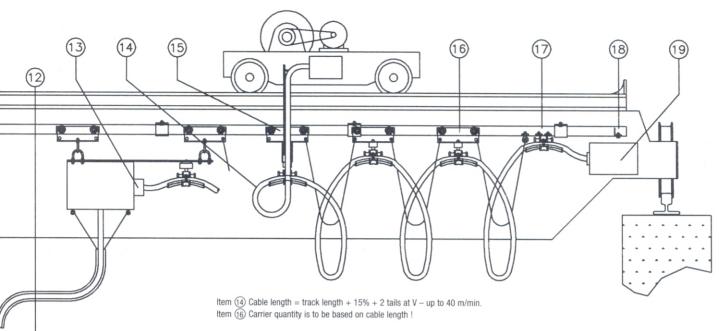


CABLE CARRIER No. 250 **STOCK No. P8053**




MASTER CARRIER No. 251 STOCK No. P8054



END CLAMP No. 252 STOCK No. P8055



ROUND CABLE CARRIER No. 246 (top only)



ed to operate a Loopsystem to feed Cranes, Hoists, Conveyors or other mobile users

y - hydraulics - pneumatics - optics



Our Parts Display above consists of:

- 11. * Pendant Pushbutton cable
- 12. POWERMITE Pushbuttonstation
- 13. Round cable glands to suit Item 14
- 14. * Round cable TR 75 to suit spec.
- 15. RD-Master carrier, w/o cable clip, coated
- 16. RD-Cable carrier, w/o cable clip, coated
- 17. RD-End clamp, w/o cable clip, coated
- 18. Endstop, galv. prevents carriers derailing
- 19. Junction box, painted
- * Please refer to POWERMITE Cable Catalogue!

To suit pushbutton requirements

To suit specifications

In required quantities

In required lengths

No. 247/00 - Stock No. P8060

No. 246/00 - Stock No. P8059

No. 248/00 - Stock No. P8061

No. 73 - Stock No. P6564


No. 150 - Stock No. P6572


travel speed of system V = 100 m/min - Item ① C-Rail length 5 m - Item ② Suspension clamp spacing 2 m


VERMITE has developed additional suitable parts within the No. 240/250 System which cannot all be shown in this publication. nquiries to satisfy your demands!


Some of the latest advertising

on energy supply products

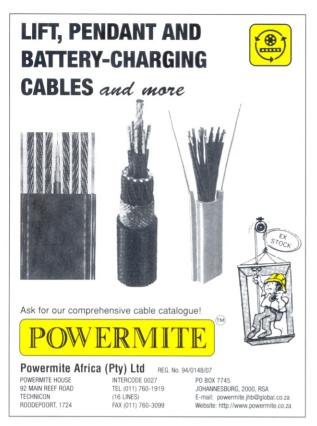

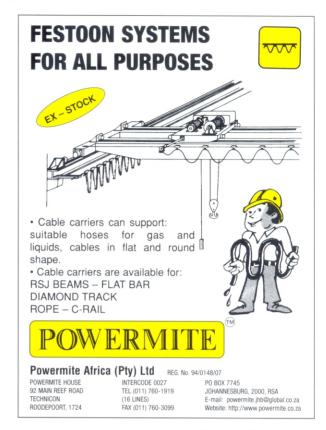

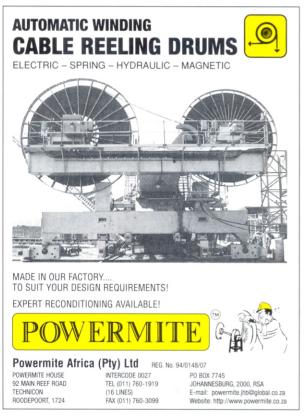

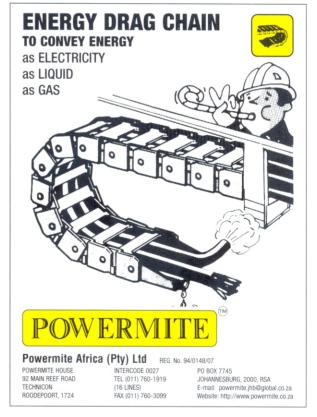

Powermite Africa (Pty) Ltd Reg. No. 94/01480/07 P.O. Box 7745 Powermite House Tel ++27 11 760-1919 (16 lines) 92 Main Reef Rd. 2000 Johannesburg Telefax ++27 11 760-3099 Technikon powermite.jhb@global.co.za E-mail 1724 Roodepoort Website http://www.powermite.co.za

JOHANNESBURG Tel. (011) 760-1919 Telefax: (011) 760-3099 WITBANK (0135)92-3448 (0135)92-8295 DURBAN 307-3920 VEREENIGING 423-3201 RICHARDS BAY (016)(016)423-3201 (0351) 51-1213/6 (03431) 58705 (0351) 51-1148 RUSTENBURG 95-0939 (0142) NEWCASTLE 95-0558 (03431) 58704 **SECUNDA** (0176)31-1004/5 (0176)34-7005 CAPE TOWN 510-6572 510-6570/1