






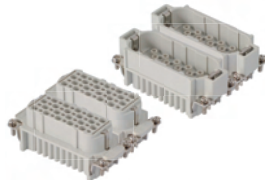
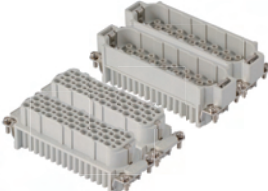


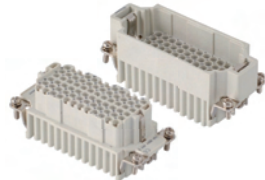
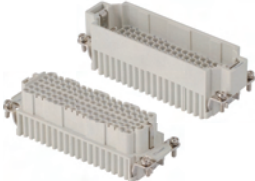
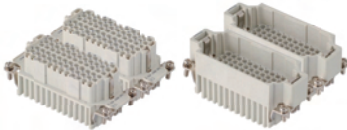
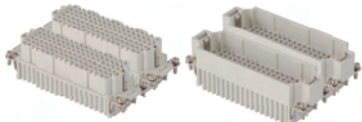


Series	S-D 10A 50V/0,8kV/3	S-D 10A 250V/4kV/3	UL US (UL,CSA), CE (RoHS)	
No. of poles	8p	7p + ⊕	15p + ⊕	25p + ⊕
Electrical characteristics according to EN61984 UL/CSA 600V-UL1977				
Size	3A «21x21»	3A «21x21»	10A «49x16»	16A «66x16»
Terminal	Crimp	Crimp	Crimp	Crimp
Wire section mm ² /AWG	0,14÷2,5 / 26-14	0,14÷2,5 / 26-14	0,14÷2,5 / 26-14	0,14÷2,5 / 26-14
Numbering	1-8	1-7 Grey Black	1-15	1-25
Female insert	7108.4002.0	7107.4001.0 A1374 7107.4001.1	7115.4006.0	7125.4012.0 A1376
Male insert	7108.4102.0	7107.4101.0 A1383 7107.4101.1	7115.4106.0	7125.4112.0 A1391
Series	S-D 10A 250V/4kV/3	UL US (UL,CSA), CE (RoHS)		
No. of poles	40p + ⊕	50p (25x2) + ⊕	64p + ⊕	80p (40x2) + ⊕
Electrical characteristics according to EN61984 UL/CSA 600V-UL1977				
Size	16B «77x27»	32A «66x40»	24B «104x27»	32B «77x62»
Terminal	Crimp	Crimp	Crimp	Crimp
Wire section mm ² /AWG	0,14÷2,5 / 26-14	0,14÷2,5 / 26-14	0,14÷2,5 / 26-14	0,14÷2,5 / 26-14
Numbering	1-40	1-25 Euromap	1-64	1-40
Female insert	7140.4018.0 A1312	7125.4012.0 7125.4012.3	7164.4024.0	7140.4018.0 x 2
Male insert	7140.4118.0 A1305	7125.4112.0 7125.4112.3	7164.4124.0	7140.4118.0 x 2
Series	S-D / S-DD 10A 250V/4kV/3	UL US (UL,CSA), CE (RoHS)		
No. of poles	S-D 128(64x2)p+ ⊕	S-DD 24p + ⊕	S-DD 42p + ⊕	S-DD 72p + ⊕
Electrical characteristics according to EN61984 UL/CSA 600V-UL1977				
Size	48B «104x62»	6B «44x27»	10B «57x27»	16B «77x27»
Terminal	Crimp	Crimp	Crimp	Crimp
Wire section mm ² /AWG	0,14÷2,5 / 26-14	0,14÷2,5 / 26-14	0,14÷2,5 / 26-14	0,14÷2,5 / 26-14
Numbering	1-64	1-24	1-42	1-72
Female insert	7164.4024.0 x 2 A1313	7124.4040.0	7142.4046.0	7172.4052.0
Male insert	7164.4124.0 x 2 A1306	7124.4140.0	7142.4146.0	7172.4152.0
Series	S-DD 10A 250V/4kV/3	UL US (UL,CSA), CE (RoHS)		
No. of poles	108p + ⊕	144(72x2)p + ⊕	216(108x2)p + ⊕	
Electrical characteristics according to EN61984 UL/CSA 600V-UL1977				
Size	24B «104x27»	32B «77x62»	48B «104x62»	
Terminal	Crimp	Crimp	Crimp	
Wire section mm ² /AWG	0,14÷2,5 / 26-14	0,14÷2,5 / 26-14	0,14÷2,5 / 26-14	
Numbering	1-108	1-72 73-144	1-108 109-216	
Female insert	7108.4058.0	7172.4052.0 7172.4053.0	7108.4058.0 7108.4059.0	
Male insert	7108.4158.0	7172.4152.0 7172.4153.0	7108.4158.0 7108.4159.0	

